


TRIPLE ACTION HYDRAULIC DEEP DRAWING PRESS

This type presses play an active part in workpiece(s) for more deeper drawing of forming purposes.

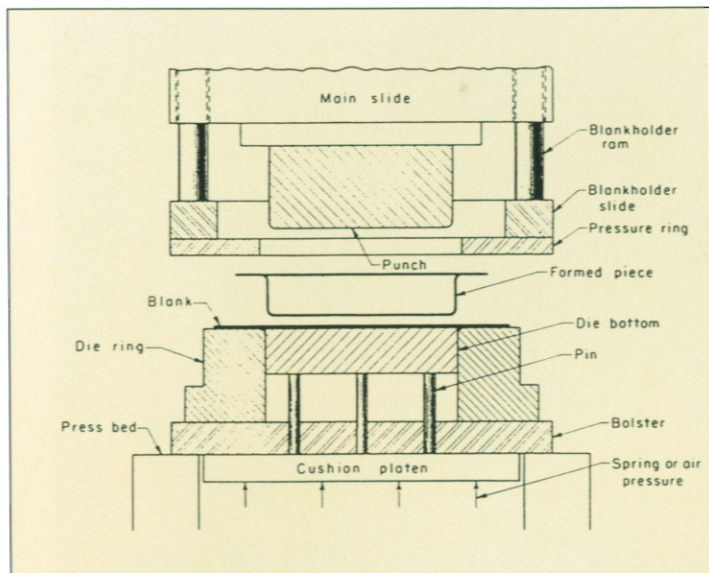

Specification		Model	LDT-800	LDT-1200	LDT-1500	LDT-2250
I N N E R P R E S S	Max. Capacity	ton	500	800	1000	1500
	Stroke	mm	1300	1500	1850	1850
	Daylight	mm	1900	2100	2350	2350
	Slide table area	mm	2000x1500	2500x1500	3000x1700	3500x1600
	Downward speed	mm/sec	340	340	340	340
	Pressing speed	mm/sec	23-11	30-15	48-24	32-16
	Upward speed	mm/sec	340	340	340	340
O U T E R P R E S S	Max. Capacity	ton	300	400	500	750
	Stroke	mm	1000	1200	1500	1500
	Daylight	mm	1600	1800	2000	2000
	Slide table area	mm	3000x2000	3500x2200	4000x2500	4500x2500
	Downward speed	mm/sec	340	340	340	340
	Pressing speed	mm/sec	18-9	24-12	38-19	30-15
	Upward speed	mm/sec	340	340	340	340
C U S P H E R I E S O S N S	Max. Capacity	ton	200	300	400	500
	Knockout capacity	ton	15	17	20	24
	Stroke	mm	300	300	400	400
	Pad area	mm	2000x1500	2900x1600	3000x1800	3800x1800
	Upward speed	mm/sec	70	70	70	70
Main motor	(60Hz)	100Hp	150Hp	150Hp x 2	150 Hp x 2	
Die cushion motor	(60Hz)	15Hp	20Hp	25Hp	25Hp	
Inner max. Upper die weight	ton	5	7	8	10	
Outer max. Upper die weight	ton	8	10	12	15	

* The above data just for reference only which without any engagement for advanced improvement.

* Specifications not given in above list will be furnished on request.